


## GREENSTONE (USA), INC.

971 Corporate Way, Fremont, CA 94539, USA Toll Free: 877-206-5021, Fax: (510) 683-9313 jamal@greenstoneusa.com www.greenstoneusa.com

## Vacuum Interrupter for Load-Breaking Switch

## GTF-25.8/2000-25

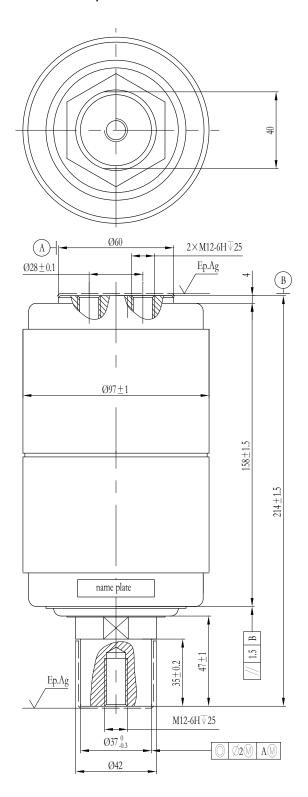

Main Technical Data			
ltem	Unit	Value	
Rated Voltage	kV	25.8	
Lightning Impulse Withstand Voltage (Peak)	kV	165☆	
Short-time (1min) Power-frequency Withstand Voltage	kV	42/77☆	
Rated Frequency	Hz	60	
Rated Current	А	2000	
Rated Short-time Withstand Current	kA	25	
Rated Duration of Short-circuit	S	1	
Rated Peak Withstand Current	kA	63	
Rated Short-circuit Making Current	kA	63	
Rated Active Load Breaking Current	А	2000	
Rated Closed-loop Breaking Current	А	2000	
Rated Single Capacitor Bank Breaking Current	А	400%	
Rated Back-to-Back Capacitor Bank Breaking Current	А	400%	
Rated Breaking Current of Cable Charging	А	16	
Mechanical Endurance	Operations	5000	
Clearance Between Open Contacts	mm	16±1	
Contact Closed Force Due to Bellows and Atmosphere	N	235±40	
Counterforce of Contact at Full Stroke	N	300±40	
Circuit Resistance at Min. Rated Contact Force	μΩ	€30	
Contact Limit Erosion	mm	3	
Mass of Moving Parts	kg	1.85	
Internal Gas Pressure	Pa	<1.33×10 <sup>-3</sup>	
Shelf Life	Years	20	

Mechanical Data of Switch Equipped With Interrupter			
ltem	Unit	Value	
Average Opening Speed	m/s	1.0±0.2	
Average Closing Speed	m/s	0.6±0.2	
Contact Bounce Duration at Closing Operation	ms	€3	
Out of Simultaneity of Contact Closing and Opening	ms	≤1	
Rated Contact Pressure	N	1100 +150	
Max. Rebound of Contact at Opening Operation	mm	2	
Overtravel During Opening	mm	€2	

Note 1: "">" Within transformer oil or equivalent isolation medium;

Note 2: "%" Rated characteristics to be given on request;

Note 3: Meets or exceeds the electrical endurance requirements of class E1 for autoreclosing duty per IEC 60265-1;

Note 4: The movable stem of the vacuum interrupter could noly suffe on more than 30N · m twisting force and in order not to damage the metal bellows, the movable stem should be prevent from rotation when assembling. For more requirements please check the Instructions of Usage.